


Handheld Scanner

NT1620S


Wmaxvision 威码视



Fast Decode



Screen Scan



Quick Scan



1D Decode



2D Decode



USB

Feature

- Screen decoding: Barcodes on mobile phone and computer screens can be directly scanned.
- Decoding capability: It can quickly and accurately decode 1D and 2D barcodes.
- Paper decoding: NTFast decoding algorithm accurately decode all kinds of barcodes at high speed

Application



Suzhou Wmaxvision Technology Co., Ltd.

TEL:0512-86860596

E-MAIL:sales@wmaxvision.com

WEB:http://www.wmaxvision.com

ADD:Building 2, Lianchuang Industrial Park, Dongfu Road, Suzhou Industrial Park, China (Jiangsu)

NT1620S

SPECIFICATIONS

Wmaxvision 威码视

Physical Characteristics

Dimensions: 169.20mm x 109.20mm x 68.20mm

Voltage: 5V

Weight : 115.5g

Starting Current: 180mA

Stand-by Current : 120mA

Work Current: 375mA

Performance Characteristics

Image (Pixels) : 640 pixels (H) x 480 pixels (V)

Light Source: (Aimer) Red color LED; (Illumination) White color LED

Field of View: 36°(H), 28°(V)

Roll / Pitch / Yaw: 360°, ±65°, ±65°

Print Contrast: 20% minimum reflective difference

Interfaces Supported: USB

Motion Tolerances: 40cm/s

Symbology Decode Capability

1-D: Codabar、Code 39、Code 32 Pharmaceutical (PARAF)、Interleaved 2 of 5、NEC 2 of 5、Code 93、Straight 2 of 5 Industrial、Straight 2 of 5 IATA、Matrix 2 of 5、Code 11、Code 128、GS1-128、UPC-A、UPC-E、EAN/JAN-8、EAN/JAN-13、MSI、GS1 DataBar Omnidirectional、GS1 DataBar Limited、GS1 DataBar Expanded、China Post(Hong Kong 2 of 5)、Korea Post.

2-D: Codeblock A、Codeblock F、PDF417、Micro PDF417、GS1 Composite Codes、QR Code、Data Matrix、MaxiCode、Aztec、HANXIN.

Decode Ranges

Code39(5mil): 30-120mm

Code39(13mil): 40-270mm

Suzhou Wmaxvision Technology Co., Ltd.

TEL: 0512-86860596

E-MAIL: sales@wmaxvision.com

WEB: <http://www.wmaxvision.com>

ADD: Building 2, Lianchuang Industrial Park, Dongfu Road, Suzhou Industrial Park, China (Jiangsu)

NT1620S

SPECIFICATIONS

Wmaxvision 威码视

User Environment

Operating Temperature : -20°C to 60°C

Storage Temperature : -30°C to 70°C



Humidity : 5% to 95% relative humidity, non-condensing

Shock Specifications : Designed to withstand 1.2m(5') drops

Ambient Light Immunity : 0-100,000 Lux.

Performance may be impacted by bar code quality and environmental conditions

Dimension (unit:mm)

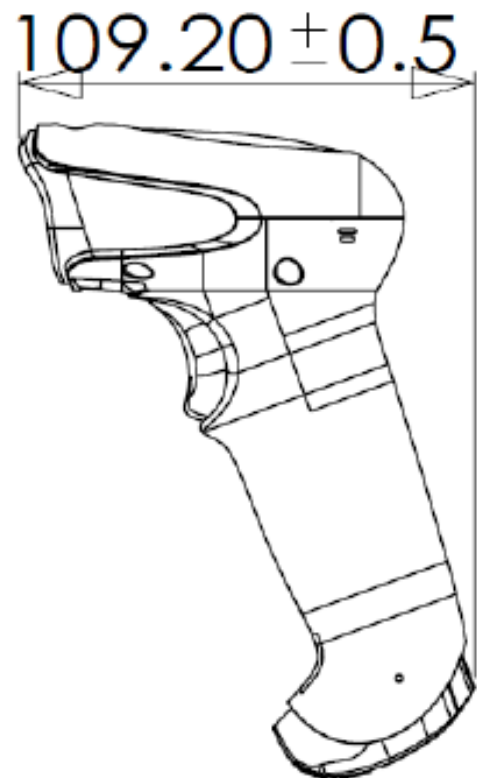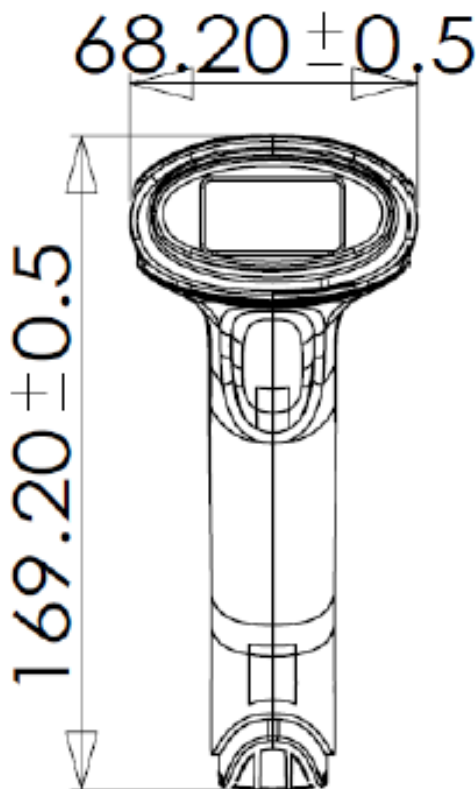

Suzhou Wmaxvision Technology Co., Ltd.

TEL:0512-86860596

E-MAIL:sales@wmaxvision.com


WEB:http://www.wmaxvision.com

ADD:Building 2, Lianchuang Industrial Park, Dongfu Road, Suzhou Industrial Park, China (Jiangsu)

Handheld Scanner

NT1620SP


Wmaxvision 威码视



Fast Decode



Screen Scan



Quick Scan



1D Decode



2D Decode



USB

Feature

- Patented algorithm, smart chip, smooth switching between paper barcode and screen barcode
- Support Alipay invoicing function
- It is suitable for all kinds of new retail industries

Application



Suzhou Wmaxvision Technology Co., Ltd.

TEL:0512-86860596

E-MAIL:sales@wmaxvision.com

WEB:http://www.wmaxvision.com

ADD:Building 2, Lianchuang Industrial Park, Dongfu Road, Suzhou Industrial Park, China (Jiangsu)

NT1620SP

SPECIFICATIONS

Wmaxvision 威码视

Physical Characteristics

Dimensions: 169.20mm x 109.20mm x 68.20mm

Voltage: 5V

Weight : 121.5g

Starting Current: 200mA

Stand-by Current : 120mA

Work Current: 380mA

Performance Characteristics

Image (Pixels) : 640 pixels (H) x 480 pixels (V)

Light Source: (Aimer) Red color LED; (Illumination) White color LED

Field of View: 28°(H), 20°(V)

Roll / Pitch / Yaw: 360°, ±65°, ±65°

Print Contrast: 20% minimum reflective difference

Interfaces Supported: USB

Motion Tolerances: 40cm/s

Resolution: ≥4mil

Symbology Decode Capability

1-D: Codabar、Code 39、Code 32 Pharmaceutical (PARAF)、Interleaved 2 of 5、NEC 2 of 5、Code 93、Straight 2 of 5 Industrial、Straight 2 of 5 IATA、Matrix 2 of 5、Code 11、Code 128、GS1-128、UPC-A、UPC-E、EAN/JAN-8、EAN/JAN-13、MSI、GS1 DataBar Omnidirectional、GS1 DataBar Limited、GS1 DataBar Expanded、China Post(Hong Kong 2 of 5)、Korea Post.

2-D: Codeblock A、Codeblock F、PDF417、Micro PDF417、GS1 Composite Codes、QR Code、Data Matrix、MaxiCode、Aztec、HANXIN.

Decode Ranges

Code39(5mil): 40-200mm

Code39(13mil): 50-400mm

QR(20mil): 30-350mm

DM(15mil): 30-200mm

Suzhou Wmaxvision Technology Co., Ltd.

TEL: 0512-86860596

E-MAIL: sales@wmaxvision.com

WEB: <http://www.wmaxvision.com>

ADD: Building 2, Lianchuang Industrial Park, Dongfu Road, Suzhou Industrial Park, China (Jiangsu)

NT1620SP

SPECIFICATIONS

Wmaxvision 威码视

User Environment

Operating Temperature : -20°C to 60°C

Storage Temperature : -30°C to 70°C



Humidity : 5% to 95% relative humidity, non-condensing

Shock Specifications : Designed to withstand 1.2m(5') drops

Ambient Light Immunity : 0-100,000 Lux.

Performance may be impacted by bar code quality and environmental conditions

Dimension (unit:mm)

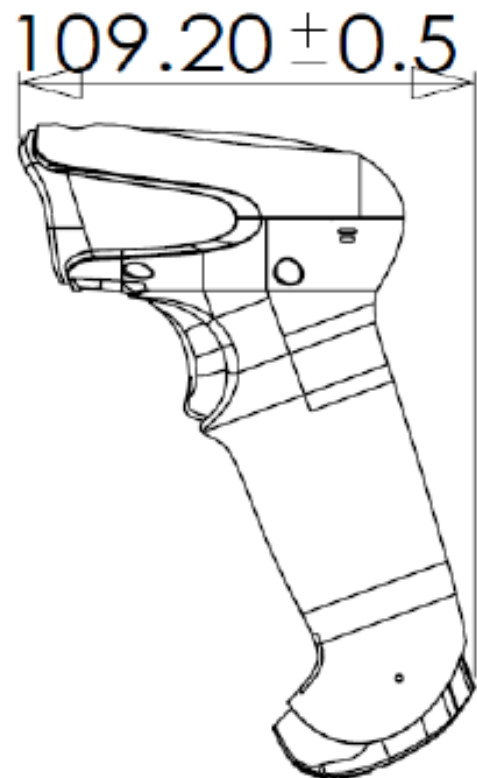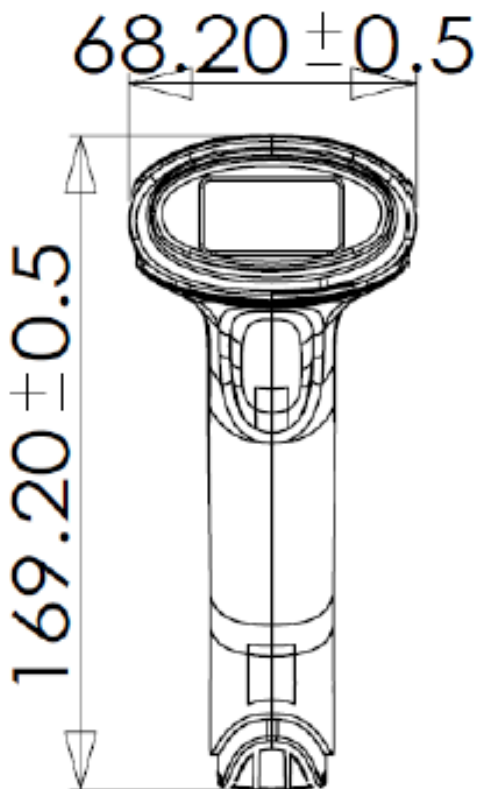

Suzhou Wmaxvision Technology Co., Ltd.

TEL:0512-86860596

E-MAIL:sales@wmaxvision.com

WEB:http://www.wmaxvision.com

ADD:Building 2, Lianchuang Industrial Park, Dongfu Road, Suzhou Industrial Park, China (Jiangsu)