


Wireless Scanner

LF1650SW


Wmaxvision 威码视




Fast Decode



Screen Scan



Quick Scan



Bluetooth



100m
transmission distance




USB

Feature

- Long-distance wireless communication technology, achieve mobile scanning within 100m (open space).
- High-density 2500mAh lithium-ion battery, fully charged can support 5 hours of continuous working.
- Supports a wide range of high-density, damaged and deformed barcode scanning.

Application

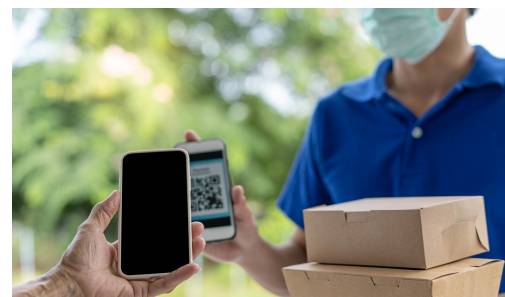

Suzhou Wmaxvision Technology Co., Ltd.

TEL:0512-86860596

E-MAIL:sales@wmaxvision.com

WEB:http://www.wmaxvision.com

ADD:Building 2, Lianchuang Industrial Park, Dongfu Road, Suzhou Industrial Park, China (Jiangsu)

LF1650SW

SPECIFICATIONS

Wmaxvision 威码视

Physical Characteristics

Dimensions: 160mm x 64mm x 97mm

Voltage: +4.2V $\pm$ 10% VDC

Weight: 188g

Starting Current: 220mA

Stand-by Current: 165mA

Work Current: 260mA

Performance Characteristics

Image (Pixels) : 640 pixels (H) x 480 pixels (V)

Light Source: (Aimer) Red color LED; (Illumination) White color LED

Wireless signal: 2.4 -2.5 GHz bandwidth range

Roll / Pitch / Yaw:360°, $\pm$ 65°, $\pm$ 65°

Print Contrast: 20% minimum reflective difference

Battery Specification: 3.7/2500mAh

Charging Time: 6.5 hours

Distance: 100m(Open space),Support storage

Storage Capacity: 20,000 Codes (13 characters/code)

Symbology Decode Capability

1-D: Codabar、Code 39、Code 32 Pharmaceutical (PARAF)、Interleaved 2 of 5、NEC 2 of 5、Code 93、Straight 2 of 5 Industrial、Straight 2 of 5 IATA, Matrix 2 of 5, Code 11、Code 128、GS1-128、UPC-A、UPC-E、EAN/JAN-8、EAN/JAN-13、MSI、GS1 DataBar Omnidirectional、GS1 DataBar Limited、GS1 DataBar Expanded、China Post(Hong Kong 2 of 5)、Korea Post.

2-D: Codeblock A、Codeblock F、PDF417、Micro PDF417、GS1 Composite Codes、QR Code、Data Matrix、MaxiCode、Aztec、HANXIN.

Suzhou Wmaxvision Technology Co., Ltd.

TEL:0512-86860596

E-MAIL:sales@wmaxvision.com

WEB:http://www.wmaxvision.com

ADD:Building 2, Lianchuang Industrial Park, Dongfu Road, Suzhou Industrial Park, China (Jiangsu)

LF1650SW

SPECIFICATIONS

Wmaxvision 威码视

Decode Ranges

Code39(5mil): 30mm-80mm

Code39(13mil): 30mm-180mm

Alipay QR(3*3cm) : 60-490mm

User Environment



Humidity : 5% to 95% relative humidity,non-condensing

Shock Specifications: Designed to withstand 1.2m(5') drops

Ambient Light Immunity :0-100,000 Lux.

Performance may be impacted by bar code quality and environmental conditions

Dimension (unit:mm)

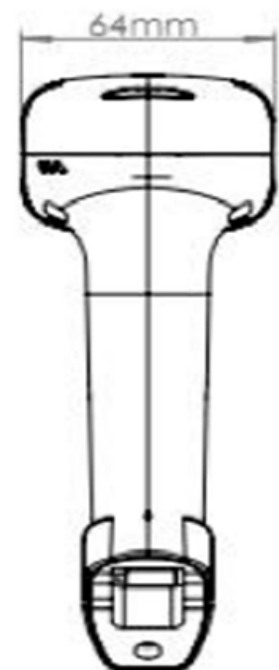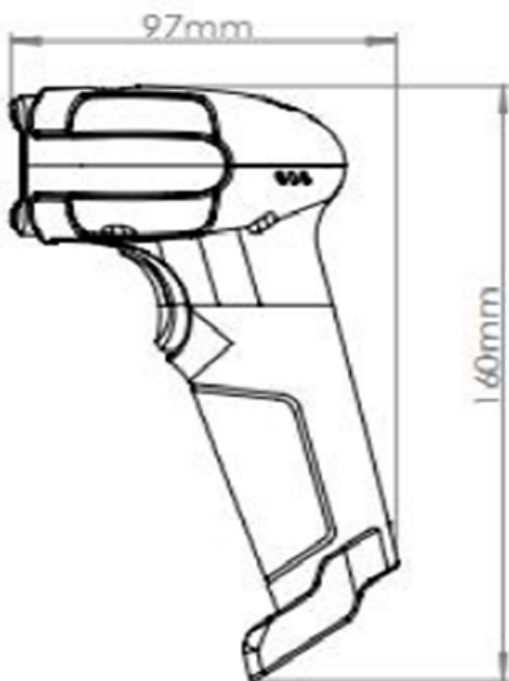

Suzhou Wmaxvision Technology Co., Ltd.

TEL:0512-86860596

E-MAIL:sales@wmaxvision.com

WEB:http://www.wmaxvision.com

ADD:Building 2, Lianchuang Industrial Park, Dongfu Road, Suzhou Industrial Park, China (Jiangsu)