


Wireless Scanner

LF1640SW


Wmaxvision 威码视




Fast Decode




Screen Scan



Quick Scan



Bluetooth



100m
transmission distance





USB

Feature

- Long-range wireless communication technology, achieve mobile scanning within 100m (open space).
- High-density 2500mAh lithium-ion battery, fully charged can support 5 hours of continuous working.
- Using the world's top decoding algorithm, it can quickly and accurately interpret various one-dimensional and two-dimensional barcodes.

Application

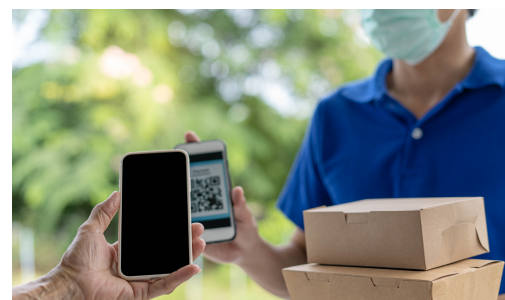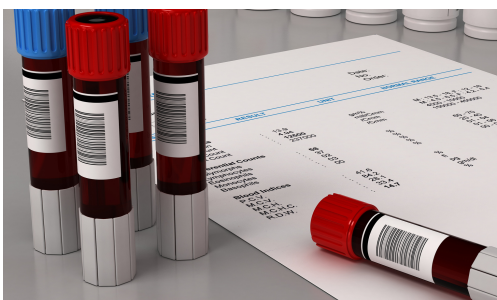

Suzhou Wmaxvision Technology Co., Ltd.

TEL:0512-86860596

E-MAIL:sales@wmaxvision.com

WEB:http://www.wmaxvision.com

ADD:Building 2, Lianchuang Industrial Park, Dongfu Road, Suzhou Industrial Park, China (Jiangsu)

LF1640SW

SPECIFICATIONS

Wmaxvision 威码视

Physical Characteristics

Dimensions: 159.99mm x 69.38mm x 107.61mm

Voltage: +4.2V±10% VDC

Weight: 188g

Starting Current: 220mA

Stand-by Current: 165mA

Work Current: 260mA

Performance Characteristics

Image (Pixels) : 640 pixels (H) x 480 pixels (V)

Light Source: (Aimer) Red color LED; (Illumination) White color LED

Wireless signal: 2.4 -2.5 GHz bandwidth range, Bluetooth V2.0/V3.0/V4.0

Interfaces Supported: 2.4G, Bluetooth

Roll / Pitch / Yaw: 360°, ±65°, ±65°

Print Contrast: 20% minimum reflective difference

Battery Specification: 3.7/2500mAh

Endurance: 5 hours

Charging Time: 6.5 hours

Distance: 100m(Open space), Support storage

Storage Capacity: 20,000 Codes (13 characters/code)

Symbology Decode Capability

1-D: Codabar、Code 39、Code 32 Pharmaceutical (PARAF)、Interleaved 2 of 5、NEC 2 of 5、Code 93、Straight 2 of 5 Industrial、Straight 2 of 5 IATA、Matrix 2 of 5、Code 11、Code 128、GS1-128、UPC-A、UPC-E、EAN/JAN-8、EAN/JAN-13、MSI、GS1 DataBar Omnidirectional、GS1 DataBar Limited、GS1 DataBar Expanded、China Post(Hong Kong 2 of 5)、Korea Post.

2-D: Codeblock A、Codeblock F、PDF417、Micro PDF417、GS1 Composite Codes、QR Code、Data Matrix、MaxiCode、Aztec、HANXIN.

Suzhou Wmaxvision Technology Co., Ltd.

TEL:0512-86860596

E-MAIL:sales@wmaxvision.com

WEB:http://www.wmaxvision.com

ADD:Building 2, Lianchuang Industrial Park, Dongfu Road, Suzhou Industrial Park, China (Jiangsu)

LF1640SW

SPECIFICATIONS

Wmaxvision 威码视

Decode Ranges

Code39(5mil): 20mm-95mm

Code39(13mil): 30mm-200mm

Alipay QR(3*3cm) : 60-490mm

Wechat pay(2.3*2.3cm): 50mm-390mm

User Environment


Humidity : 5% to 95% relative humidity, non-condensing

Shock Specifications : Designed to withstand 1.5m(5') drops

Ambient Light Immunity : 0-100,000 Lux.

Performance may be impacted by bar code quality and environmental conditions

Dimension (unit:mm)

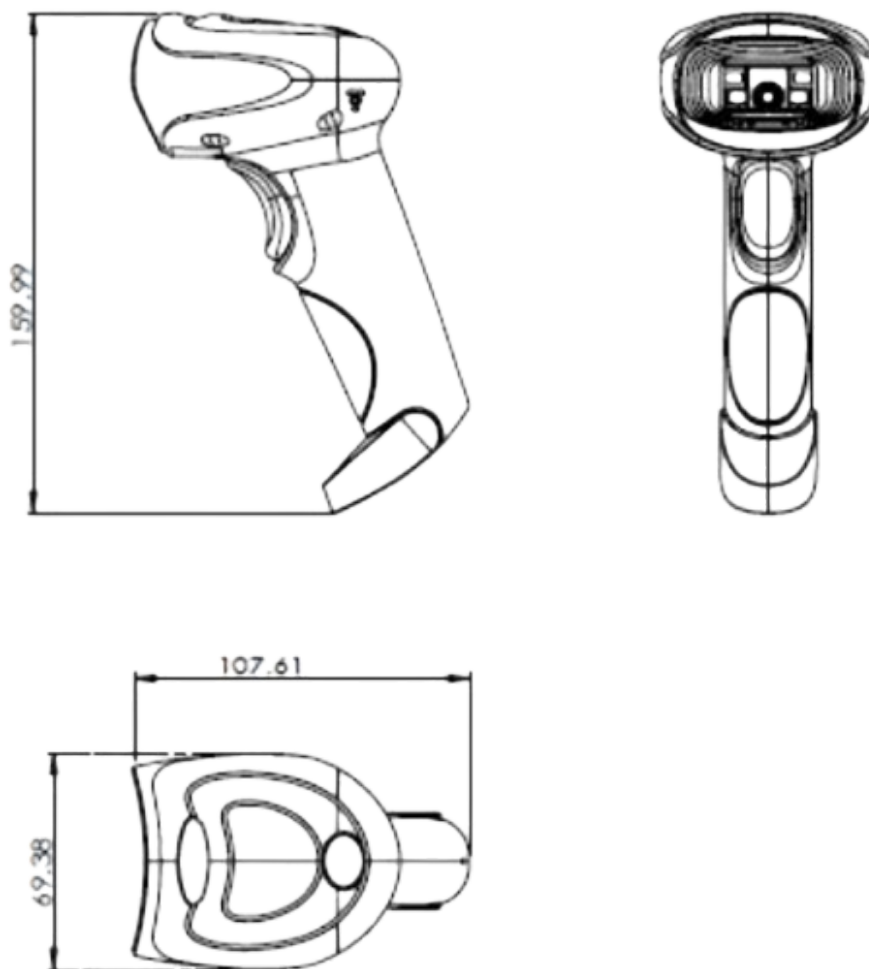

Suzhou Wmaxvision Technology Co., Ltd.

TEL:0512-86860596

E-MAIL:sales@wmaxvision.com


WEB:http://www.wmaxvision.com

ADD:Building 2, Lianchuang Industrial Park, Dongfu Road, Suzhou Industrial Park, China (Jiangsu)

Wireless Scanner

LF1640PW


Wmaxvision 威码视




Fast Decode




Screen Scan



Quick Scan



Bluetooth



100m
transmission distance




USB

Feature

- Long-range wireless communication technology, achieve mobile scanning within 100m (open space).
- High-density 2500mAh lithium-ion battery, fully charged can support 5 hours of continuous working.
- Using the world's top decoding algorithm, it can quickly and accurately interpret various one-dimensional and two-dimensional barcodes.

Application

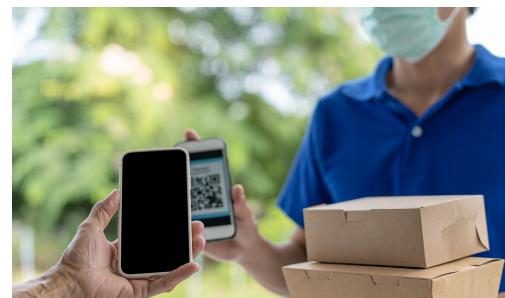

Suzhou Wmaxvision Technology Co., Ltd.

TEL:0512-86860596

E-MAIL:sales@wmaxvision.com

WEB:http://www.wmaxvision.com

ADD:Building 2, Lianchuang Industrial Park, Dongfu Road, Suzhou Industrial Park, China (Jiangsu)

LF1640PW

SPECIFICATIONS

Wmaxvision 威码视

Physical Characteristics

Dimensions: 159.99mm x 69.38mm x 107.61mm

Voltage: +4.2V±10% VDC

Weight: 188.5g

Starting Current: 204mA

Stand-by Current: 96mA

Work Current: 226mA

Performance Characteristics

Image (Pixels): CMOS 640 pixels (H) x 480 pixels (V)

Light Source: (Aimer) Red color LED; (Illumination) White color LED

Wireless signal: 2.4 -2.5 GHz bandwidth range, Bluetooth V2.0/V3.0/V4.0

Interfaces Supported: 2.4G, Bluetooth

Print Contrast: 20% minimum reflective difference

Battery Specification: 3.7/2500mAh

Endurance: 5 hours

Charging Time: 6.5 hours

Distance: 100m(Open space),Support storage

Storage Capacity: 20,000 Codes (13 characters/code)

Field of View: 28°(Horizontal), 20°(Vertical)

Symbology Decode Capability

1-D: Codabar、Code 39、Code 32 Pharmaceutical (PARAF)、Interleaved 2 of 5、NEC 2 of 5、Code 93、Straight 2 of 5 Industrial、Straight 2 of 5 IATA、Matrix 2 of 5、Code 11、Code 128、GS1-128、UPC-A、UPC-E、EAN/JAN-8、EAN/JAN-13、MSI、GS1 DataBar Omnidirectional、GS1 DataBar Limited、GS1 DataBar Expanded、China Post(Hong Kong 2 of 5)、Korea Post.

2-D: Codeblock A、Codeblock F、PDF417、Micro PDF417、GS1 Composite Codes、QR Code、Data Matrix、MaxiCode、Aztec、HANXIN.

Suzhou Wmaxvision Technology Co., Ltd.

TEL:0512-86860596

E-MAIL:sales@wmaxvision.com

WEB:http://www.wmaxvision.com

ADD:Building 2, Lianchuang Industrial Park, Dongfu Road, Suzhou Industrial Park, China (Jiangsu)

LF1640PW

SPECIFICATIONS

Wmaxvision 威码视

Decode Ranges

Code39(5mil): 40mm-190mm

Code39(13mil): 60mm-380mm

QR(20mil): 25mm-260mm

EAN-13(5mil): 55mm-170mm

User Environment


Humidity : 5% to 95% relative humidity, non-condensing

Shock Specifications : Designed to withstand 1.5m(5') drops

Ambient Light Immunity : 0-100,000 Lux.

Performance may be impacted by bar code quality and environmental conditions

Dimension (unit:mm)

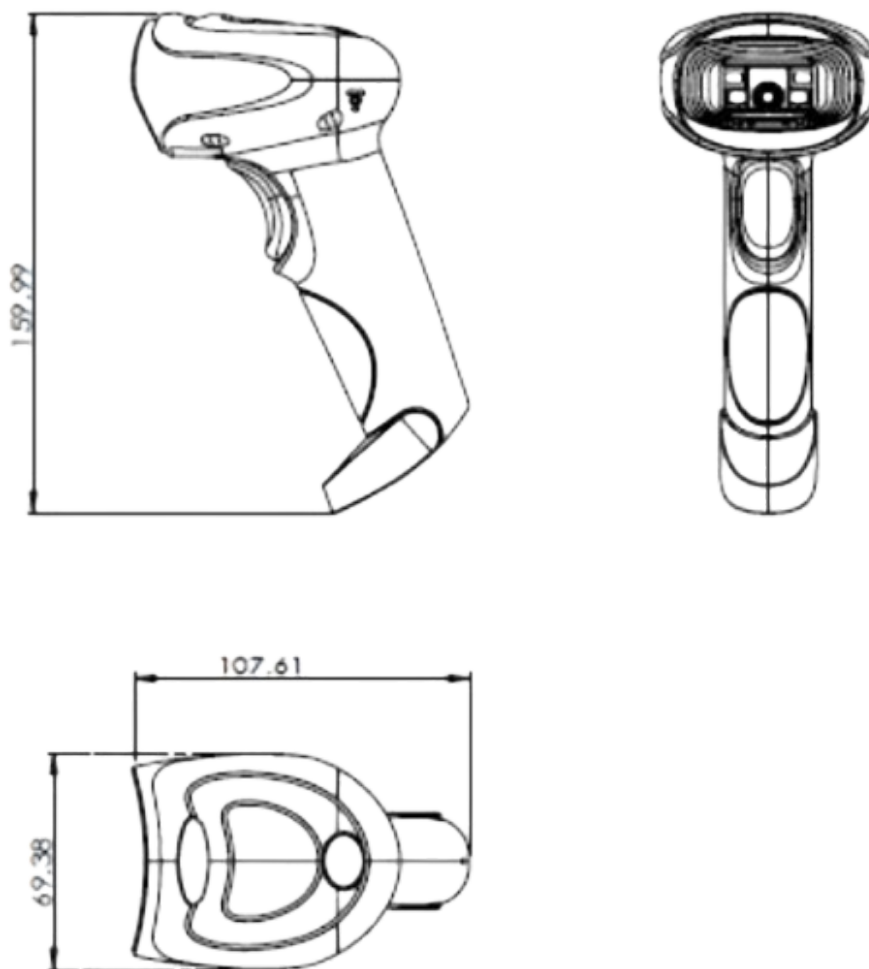

Suzhou Wmaxvision Technology Co., Ltd.

TEL:0512-86860596

E-MAIL:sales@wmaxvision.com


WEB:http://www.wmaxvision.com

ADD:Building 2, Lianchuang Industrial Park, Dongfu Road, Suzhou Industrial Park, China (Jiangsu)

Wireless Scanner

LF1640HW


Wmaxvision 威码视




Fast Decode




Screen Scan



Quick Scan



Bluetooth



100m
transmission distance





USB

Feature

- Long-range wireless communication technology, achieve mobile scanning within 100m (open space).
- High-density 2500mAh lithium-ion battery, fully charged can support 5 hours of continuous working.
- Using the world's top decoding algorithm, it can quickly and accurately interpret various one-dimensional and two-dimensional barcodes.

Application

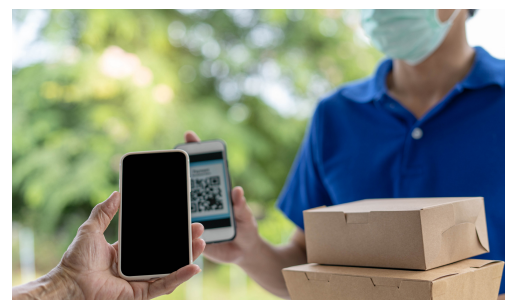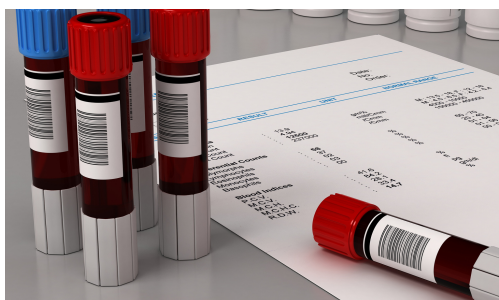

Suzhou Wmaxvision Technology Co., Ltd.

TEL:0512-86860596

E-MAIL:sales@wmaxvision.com

WEB:http://www.wmaxvision.com

ADD:Building 2, Lianchuang Industrial Park, Dongfu Road, Suzhou Industrial Park, China (Jiangsu)

LF1640HW

SPECIFICATIONS

Wmaxvision 威码视

Physical Characteristics

Dimensions: 163.10mm x 69.30mm x 106.3mm

Voltage: +4.2V±10% VDC

Weight: 140.5g

Starting Current: 204mA

Stand-by Current: 96mA

Work Current: 226mA

Performance Characteristics

Image (Pixels): CMOS 1280 pixels (H) x 1024 pixels (V)

Light Source: (Aimer) Red color LED; (Illumination) White color LED

Wireless signal: 2.4 -2.5 GHz bandwidth range, Bluetooth V2.0/V3.0/V4.0

Interfaces Supported: 2.4G, Bluetooth

Print Contrast: 20% minimum reflective difference

Battery Specification: 3.7/2500mAh

Endurance: 5 hours

Charging Time: 6.5 hours

Distance: 100m(Open space),Support storage

Storage Capacity: 20,000 Codes (13 characters/code)

Field of View: 28°(Horizontal), 20°(Vertical)

Symbology Decode Capability

1-D: Codabar、Code 39、Code 32 Pharmaceutical (PARAF)、Interleaved 2 of 5、NEC 2 of 5、Code 93、Straight 2 of 5 Industrial、Straight 2 of 5 IATA, Matrix 2 of 5, Code 11、Code 128、GS1-128、UPC-A、UPC-E、EAN/JAN-8、EAN/JAN-13、MSI、GS1 DataBar Omnidirectional、GS1 DataBar Limited、GS1 DataBar Expanded、China Post(Hong Kong 2 of 5)、Korea Post.

2-D: PDF417, QR code, MicroPDF417, MaxiCode, Codablock, Aztec, DataMatrix.

Suzhou Wmaxvision Technology Co., Ltd.

TEL:0512-86860596

E-MAIL:sales@wmaxvision.com

WEB:http://www.wmaxvision.com

ADD:Building 2, Lianchuang Industrial Park, Dongfu Road, Suzhou Industrial Park, China (Jiangsu)

LF1640HW

SPECIFICATIONS

Wmaxvision 威码视

Decode Ranges

Code39(5mil): 30mm-180mm

Code39(13mil): 40mm-340mm

QR(20mil): 25mm-210mm

EAN-13(5mil): 25mm-170mm

User Environment

Humidity : 5% to 95% relative humidity, non-condensing

Shock Specifications : Designed to withstand 1.5m(5') drops


Ambient Light Immunity : 0-100,000 Lux.

Operating Temperature: 0°C to 60°C

Storage Temperature: -30°C to 70°C

Performance may be impacted by bar code quality and environmental conditions

Dimension (unit:mm)

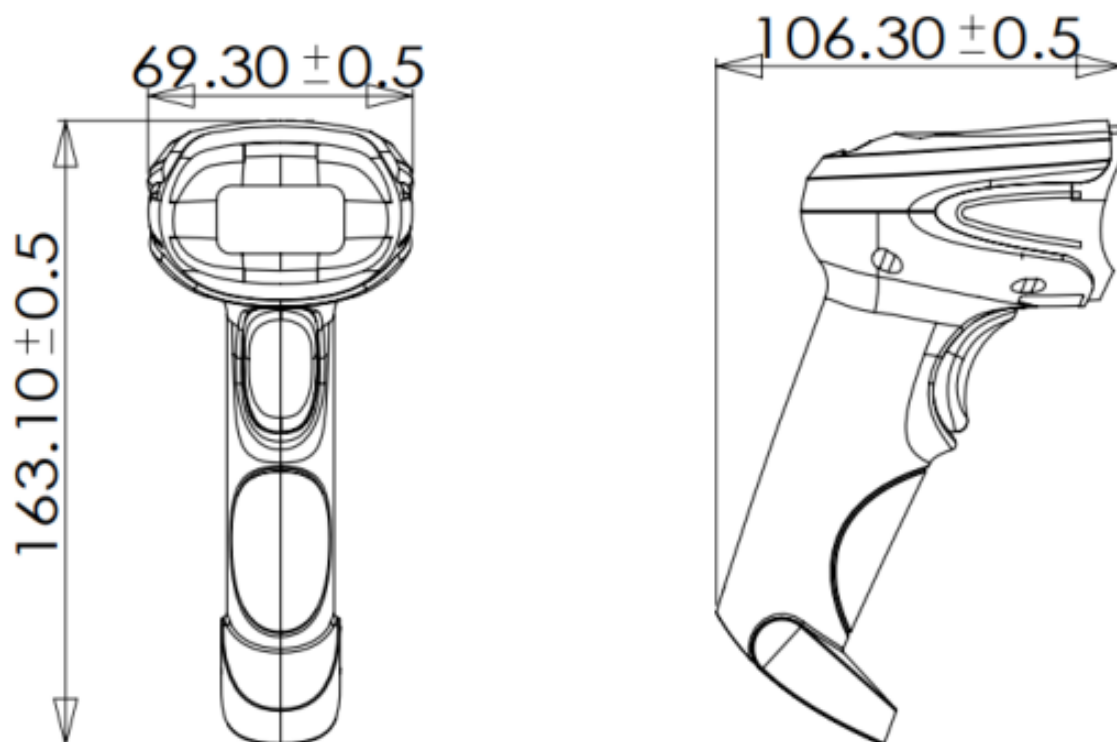

Suzhou Wmaxvision Technology Co., Ltd.

TEL:0512-86860596

E-MAIL:sales@wmaxvision.com


WEB:http://www.wmaxvision.com

ADD:Building 2, Lianchuang Industrial Park, Dongfu Road, Suzhou Industrial Park, China (Jiangsu)

Wireless Scanner

NT1640HPW


Wmaxvision 威码视




Fast Decode




Screen Scan



Quick Scan



Bluetooth



100m
transmission distance




USB

Feature

- Long-range wireless communication technology, achieve mobile scanning within 100m (open space).
- High-density 2500mAh lithium-ion battery, fully charged can support 5 hours of continuous working.
- Using the world's top decoding algorithm, it can quickly and accurately interpret various one-dimensional and two-dimensional barcodes.

Application

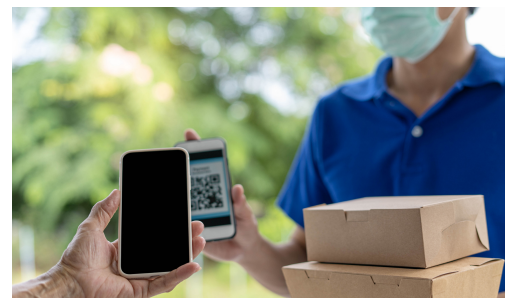

Suzhou Wmaxvision Technology Co., Ltd.

TEL:0512-86860596

E-MAIL:sales@wmaxvision.com

WEB:http://www.wmaxvision.com

ADD:Building 2, Lianchuang Industrial Park, Dongfu Road, Suzhou Industrial Park, China (Jiangsu)

NT1640HPW

SPECIFICATIONS

Wmaxvision 威码视

Physical Characteristics

Dimensions: 159.99mm x 69.38mm x 107.61mm

Voltage: 5V

Weight: 140.5g

Starting Current: 210mA

Stand-by Current: 130mA

Work Current: 266mA

Performance Characteristics

Image (Pixels): 1280 pixels (H) x 1024 pixels (V)

Light Source: (Aimer) Red color LED; (Illumination) White color LED

Roll / Pitch / Yaw: 360°(Roll), ±65°(Skew), ±65°(Pitch)

Print Contrast: 20% minimum reflective difference

Battery Specification: 3.7/2500mAh

Charging Time: 6.5 hours

Distance: 100m(Open space), Support storage

Storage Capacity: 20,000 Codes (13 characters/code)

Field of View: 44°(H) X 34°(V)

Symbology Decode Capability

1-D: Codabar、Code 39、Code 32 Pharmaceutical (PARAF)、Interleaved 2 of 5、NEC 2 of 5、Code 93、Straight 2 of 5 Industrial、Straight 2 of 5 IATA、Matrix 2 of 5、Code 11、Code 128、GS1-128、UPC-A、UPC-E、EAN/JAN-8、EAN/JAN-13、MSI、GS1 DataBar Omnidirectional、GS1 DataBar Limited、GS1 DataBar Expanded、China Post(Hong Kong 2 of 5)、Korea Post.

2-D: Codeblock A、Codeblock F、PDF417、Micro PDF417、GS1 Composite Codes、QR Code、Data Matrix、MaxiCode、Aztec、HANXIN.

User Environment

Humidity : 5% to 95% relative humidity, non-condensing

Designed to withstand 1.2m(5') drops

Ambient Light Immunity : 0-100,000 Lux.

ESD: ± 8kV indirect coupling surface, ± 15kV direct air discharge

Suzhou Wmaxvision Technology Co., Ltd.

TEL: 0512-86860596

E-MAIL: sales@wmaxvision.com

WEB: <http://www.wmaxvision.com>

ADD: Building 2, Lianchuang Industrial Park, Dongfu Road, Suzhou Industrial Park, China (Jiangsu)

NT1640HPW

SPECIFICATIONS

Wmaxvision 威码视

Decode Ranges

Code39(5mil): 7-30cm

Code39(13mil): 5-55cm




QR(15mil): 4-28cm

QR(20mil): 4-36cm

QR(30mil): 4.5-45cm

Performance may be impacted by bar code quality and environmental conditions

Dimension (unit:mm)

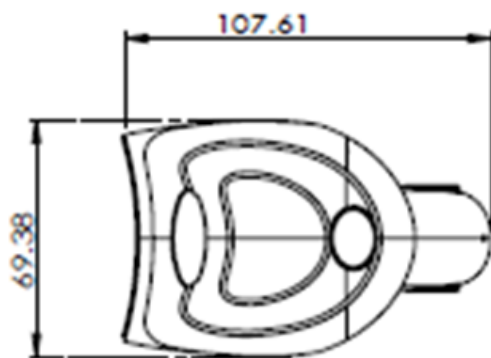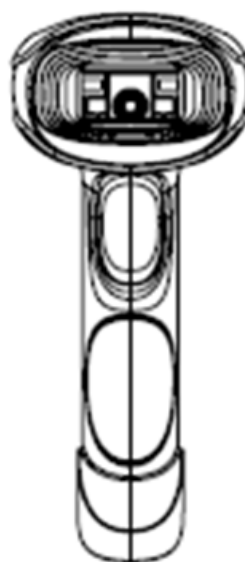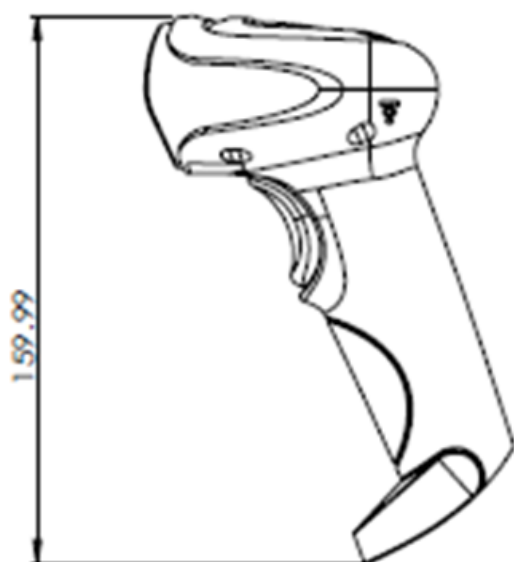

Suzhou Wmaxvision Technology Co., Ltd.

TEL:0512-86860596

E-MAIL:sales@wmaxvision.com


WEB:http://www.wmaxvision.com

ADD:Building 2, Lianchuang Industrial Park, Dongfu Road, Suzhou Industrial Park, China (Jiangsu)

Wireless Scanner

NT1640HDW


Wmaxvision 威码视




Fast Decode




Screen Scan



Quick Scan



Bluetooth



100m
transmission distance




USB

Feature

- Long-range wireless communication technology, achieve mobile scanning within 100m (open space).
- High-density 2500mAh lithium-ion battery, fully charged can support 5 hours of continuous working.
- Using the world's top decoding algorithm, it can quickly and accurately interpret various one-dimensional and two-dimensional barcodes.

Application

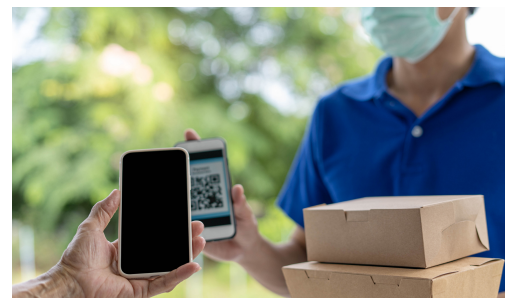

Suzhou Wmaxvision Technology Co., Ltd.

TEL:0512-86860596

E-MAIL:sales@wmaxvision.com

WEB:http://www.wmaxvision.com

ADD:Building 2, Lianchuang Industrial Park, Dongfu Road, Suzhou Industrial Park, China (Jiangsu)

NT1640HDW

SPECIFICATIONS

Wmaxvision 威码视

Physical Characteristics

Dimensions: 159.99mm x 69.38mm x 107.61mm

Voltage: 5V

Weight: 140.5g

Starting Current: 210mA

Stand-by Current: 130mA

Work Current: 266mA

Performance Characteristics

Image (Pixels): 1280 pixels (H) x 1024 pixels (V)

Light Source: (Aimer) Red color LED; (Illumination) White color LED

Roll / Pitch / Yaw: 360°(Roll), ±65°(Skew), ±65°(Pitch)

Print Contrast: 20% minimum reflective difference

Battery Specification: 3.7/2500mAh

Charging Time: 6.5 hours

Distance: 100m(Open space), Support storage

Storage Capacity: 20,000 Codes (13 characters/code)

Field of View: 44°(H) X 34°(V)

Symbology Decode Capability

1-D: Codabar、Code 39、Code 32 Pharmaceutical (PARAF)、Interleaved 2 of 5、NEC 2 of 5、Code 93、Straight 2 of 5 Industrial、Straight 2 of 5 IATA、Matrix 2 of 5、Code 11、Code 128、GS1-128、UPC-A、UPC-E、EAN/JAN-8、EAN/JAN-13、MSI、GS1 DataBar Omnidirectional、GS1 DataBar Limited、GS1 DataBar Expanded、China Post(Hong Kong 2 of 5)、Korea Post.

2-D: Codeblock A、Codeblock F、PDF417、Micro PDF417、GS1 Composite Codes、QR Code、Data Matrix、MaxiCode、Aztec、HANXIN.

User Environment

Humidity : 5% to 95% relative humidity, non-condensing

Designed to withstand 1.2m(5') drops

Ambient Light Immunity : 0-100,000 Lux.

ESD: ± 8kV indirect coupling surface, ± 15kV direct air discharge

Suzhou Wmaxvision Technology Co., Ltd.

TEL: 0512-86860596

E-MAIL: sales@wmaxvision.com

WEB: <http://www.wmaxvision.com>

ADD: Building 2, Lianchuang Industrial Park, Dongfu Road, Suzhou Industrial Park, China (Jiangsu)

NT1640HDW

SPECIFICATIONS

Wmaxvision 威码视

Decode Ranges

Code39(5mil): 3-22cm

Code39(13mil): 4-40cm




QR(15mil): 2-26cm

QR(20mil): 2-28cm

QR(30mil): 2-30cm

Performance may be impacted by bar code quality and environmental conditions

Dimension (unit:mm)

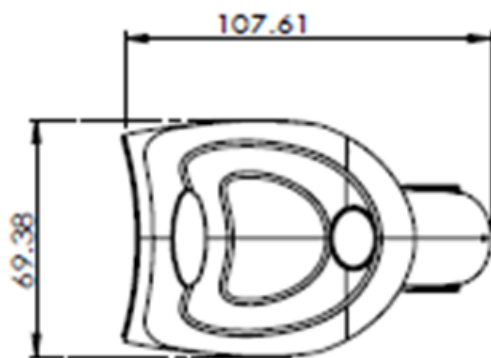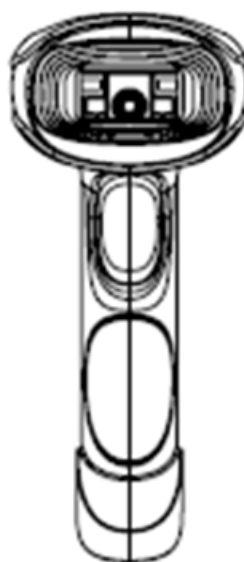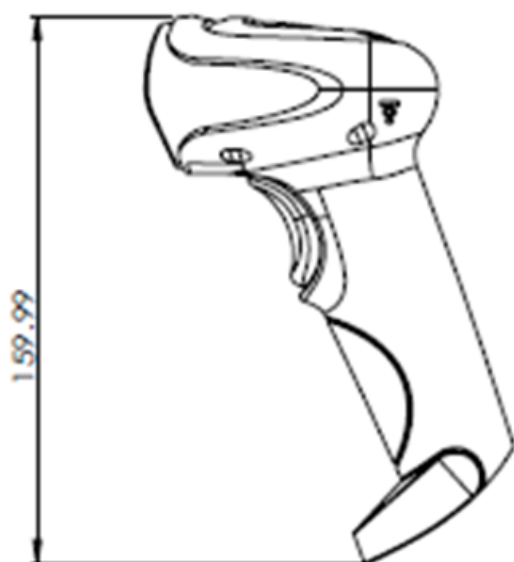

Suzhou Wmaxvision Technology Co., Ltd.

TEL:0512-86860596

E-MAIL:sales@wmaxvision.com

WEB:http://www.wmaxvision.com

ADD:Building 2, Lianchuang Industrial Park, Dongfu Road, Suzhou Industrial Park, China (Jiangsu)