


Platform Scanner

NT4000


Wmaxvision 威码视



Fast Decode



Screen Scan



Quick Scan



1D Decode



2D Decode



USB

Feature

- Built-in front and rear dual cameras. Scanning codes and checkout at the same time
- It is suitable for all kinds of new retail industries like ticket inspection
- Smooth interpretation of paper barcodes and mobile phone barcodes
- The rotatable structure can meet more application scenarios

Application



Suzhou Wmaxvision Technology Co., Ltd.

TEL:0512-86860596

E-MAIL:sales@wmaxvision.com

WEB:http://www.wmaxvision.com

ADD:Building 2, Lianchuang Industrial Park, Dongfu Road, Suzhou Industrial Park, China (Jiangsu)

NT4000

SPECIFICATIONS

Wmaxvision 威码视

Physical Characteristic

Dimensions: 109.4mm x 153.3mm x101.8mm

Voltage:5V

Weight: 297.5g

Starting Current: 430mA

Stand-by Current: 240mA

Work Current: 430mA

Performance Characteristics

Image (Pixels) :

Main CMOS 640 pixels (H) x 480 pixels (V)

Secondary CMOS 640 pixels (H) x 480 pixels (V)

Light Source: Red color LED (Illumination)

Field of View: Main 39°(H) X29°(V)

Secondary 56°(H) X44°(V)

Roll / Pitch / Yaw:360°, ±65°, ±65°

Print Contrast: 20% minimum reflective difference

Interfaces Supported:USB/ USBCOM

Resolution:≥4mil

Symbology Decode Capability

1-D: Codabar、Code 39、Code 32 Pharmaceutical (PARAF)、Interleaved 2 of 5、NEC 2 of 5、Code 93、Straight 2 of 5 Industrial、Straight 2 of 5 IATA, Matrix 2 of 5, Code 11、Code 128、GS1-128、UPC-A、UPC-E、EAN/JAN-8、EAN/JAN-13、MSI、GS1 DataBar Omnidirectional、GS1 DataBar Limited、GS1 DataBar Expanded、China Post(Hong Kong 2 of 5)、Korea Post.

2-D: DOT Code, Codeblock A、Codeblock F、PDF417、Micro PDF417、GS1 Composite Codes、QR Code、Data Matrix、MaxiCode、Aztec、HANXIN.

Decode Ranges

Main Code39(5mil): 0-7cm

Main Code39(13mil): 0-16cm

Main UPC-A(13mil): 1-16cm

Secondary Alipay(QR 3*3): 3-20cm

Secondary Wechat pay(QR 3*3): 3-18cm

Suzhou Wmaxvision Technology Co., Ltd.

TEL:0512-86860596

E-MAIL:sales@wmaxvision.com

WEB:http://www.wmaxvision.com

ADD:Building 2, Lianchuang Industrial Park, Dongfu Road, Suzhou Industrial Park, China (Jiangsu)

NT4000

SPECIFICATIONS

Wmaxvision 威码视

User Environment

Operating Temperature : -20°C to 60°C

Storage Temperature : -30°C to 70°C


Humidity : 5% to 95% relative humidity, non-condensing

Shock Specifications : Designed to withstand 1.2m(5') drops

Ambient Light Immunity : 0-100,000 Lux.

Performance may be impacted by bar code quality and environmental conditions

Dimension (unit:mm)

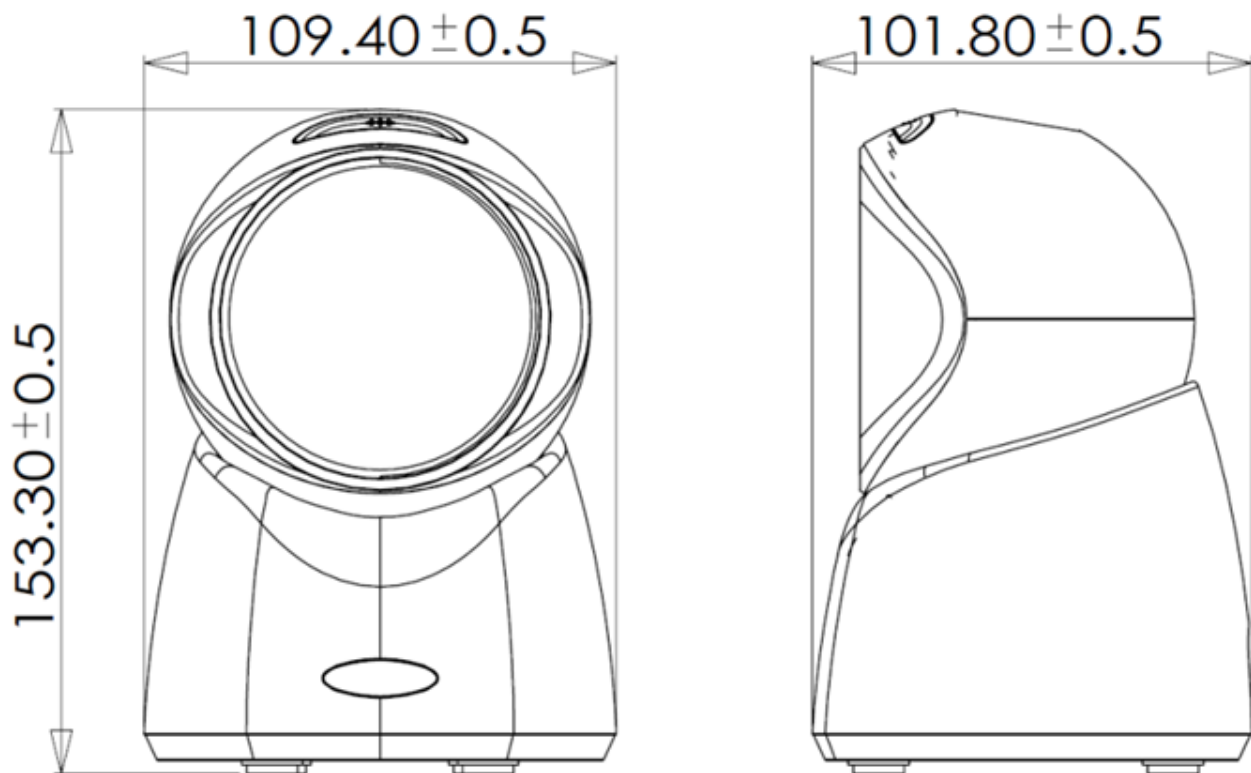

Suzhou Wmaxvision Technology Co., Ltd.

TEL:0512-86860596

E-MAIL:sales@wmaxvision.com

WEB:http://www.wmaxvision.com

ADD:Building 2, Lianchuang Industrial Park, Dongfu Road, Suzhou Industrial Park, China (Jiangsu)