


Module Barcode Scanner

NT4610S


Wmaxvision 威码视



Fast Decode



Self Service




Quick Scan



1D Decode



2D Decode



USB

Feature

- Wide application: It is suitable for various new retail industries
- Support code: Switch smoothly between paper barcodes and mobile phone barcodes
- Easy to use: Hard decoding, no more manipulation required

Application



Suzhou Wmaxvision Technology Co., Ltd.

TEL:0512-86860596

E-MAIL:sales@wmaxvision.com

WEB:http://www.wmaxvision.com

ADD:Building 2, Lianchuang Industrial Park, Dongfu Road, Suzhou Industrial Park, China (Jiangsu)

NT4610S

SPECIFICATIONS

Wmaxvision 威码视

Physical Characteristics

Dimensions: 114mm x 93.3mm x 56.9mm

Voltage: 5V

Weight: 220g

Starting Current: 245mA

Stand-by Current: 170mA

Work Current: 250mA

Performance Characteristics

Image (Pixels): 1024 pixels (H)x 1280 pixels (V)

Light Source: white (Warm) LED

Field of View: 68°(H) , 58°(V)/96*76mm (Window Size)

Roll / Pitch / Yaw: 360°, ±65°, ±65°

Print Contrast: 20% minimum reflective difference

Interfaces Supported: USB, TTL-232

Motion Tolerances: >1.8m/s

Minimum Resolution: ≥4mil

Decoding time: ≤1s

Symbology Decode Capability

1-D: Codabar、Code 39、Code 32 Pharmaceutical (PARAF)、Interleaved 2 of 5、NEC 2 of 5、Code 93、Straight 2 of 5 Industrial、Straight 2 of 5 IATA、Matrix 2 of 5、Code 11、Code 128、GS1-128、UPC-A、UPC-E、EAN/JAN-8、EAN/JAN-13、MSI、GS1 DataBar Omnidirectional、GS1 DataBar Limited、GS1 DataBar Expanded、China Post(Hong Kong 2 of 5)、Korea Post

2-D: PDF417, QR code, MicroPDF417, Australian Post, Canada Post, Japan Post, MaxiCode, Codablock, Aztec, Dutch Post, DataMatrix, etc.

Decode Ranges

EAN13(13mil): 10mm-100mm

PDF417(6.7mil): 5mm-45mm

Data Matrix(13mil): 5mm-40mm

QR Code (15mil): 10mm-50mm

Suzhou Wmaxvision Technology Co., Ltd.

TEL:0512-86860596

E-MAIL:sales@wmaxvision.com

WEB:http://www.wmaxvision.com

ADD:Building 2, Lianchuang Industrial Park, Dongfu Road, Suzhou Industrial Park, China (Jiangsu)

NT4610S

SPECIFICATIONS

Wmaxvision 威码视

User Environment

Operating Temperature : -20°C to 60°C

Storage Temperature : -30°C to 70°C


Humidity : 5% to 95% relative humidity, non-condensing

Shock Specifications: 8 G r.m.s., from 10 to 500 Hz, 2 hours per axis, 3 axes

Ambient Light Immunity : 0-100,000 Lux.

Performance may be impacted by bar code quality and environmental conditions

Dimension (unit:mm)

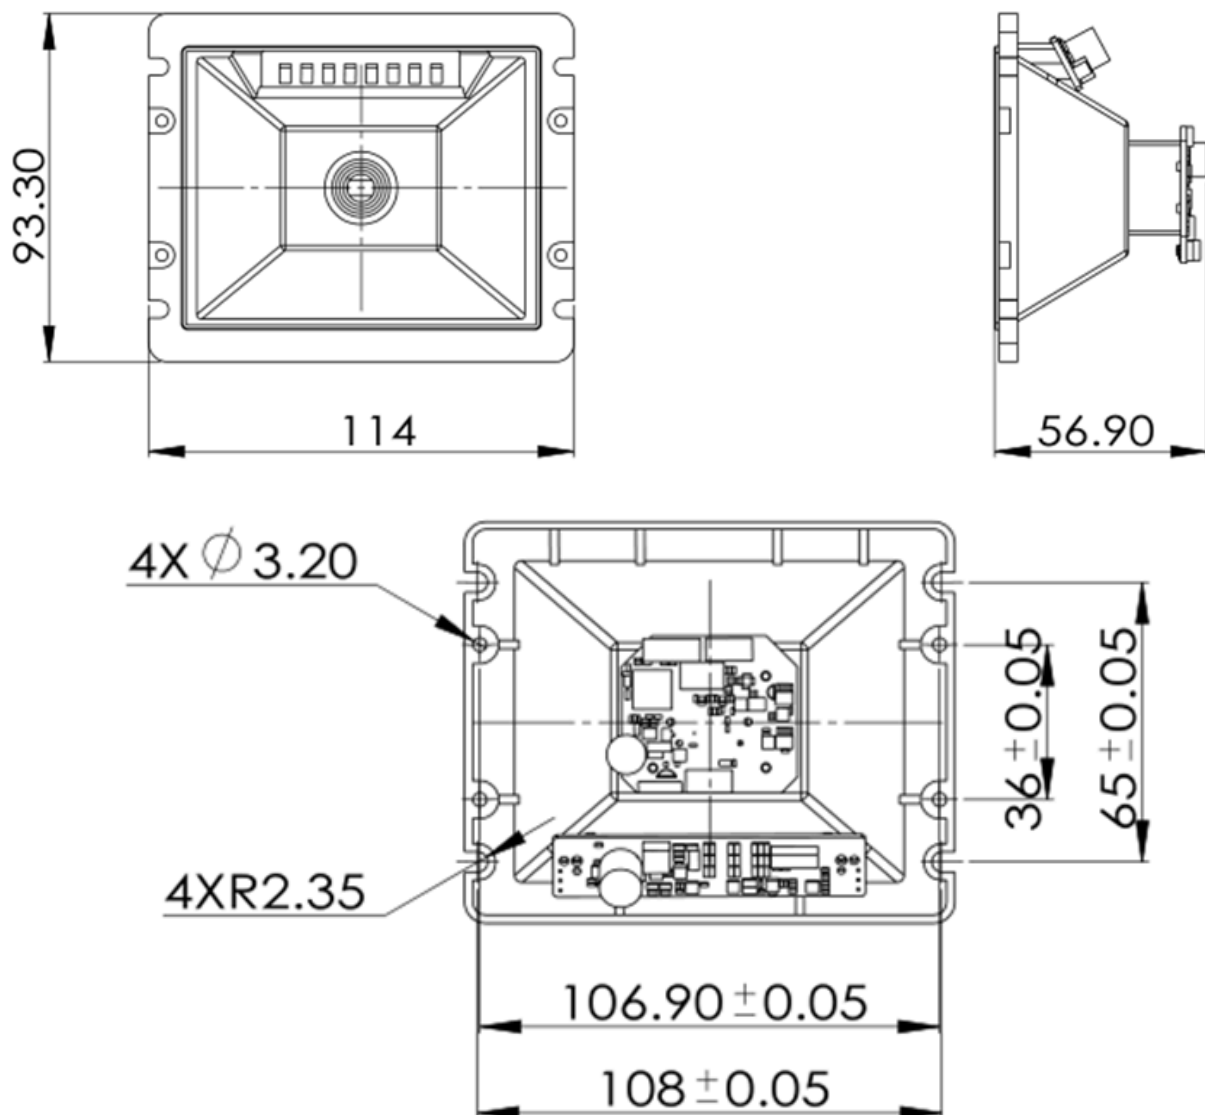

Suzhou Wmaxvision Technology Co., Ltd.

TEL:0512-86860596

E-MAIL:sales@wmaxvision.com

WEB:http://www.wmaxvision.com

ADD:Building 2, Lianchuang Industrial Park, Dongfu Road, Suzhou Industrial Park, China (Jiangsu)