



Industrial-grade Barcode Scanner VS400


Wmaxvision 威码视



Fast Decode



IP54




Quick Scan



1D Decode



2D Decode



USB

Feature

- Fast and stable reading performance in various applications including many challenging conditions
- VS40x has DPM, HD and HP versions in different scan performances for different applications

Application



Suzhou Wmaxvision Technology Co., Ltd.

TEL:0512-86860596

E-MAIL:sales@wmaxvision.com

WEB:http://www.wmaxvision.com

ADD:Building 2, Lianchuang Industrial Park, Dongfu Road, Suzhou Industrial Park, China (Jiangsu)

VS400

SPECIFICATIONS

Wmaxvision 威码视

Physical Characteristics

Dimensions: Corded:163 x 106 x 69mm
Cordless:201 x 94 x 102mm

Voltage: 5VDC $\pm$ 5%

Weight : Corded: 147g
Cordless: 360g

Operating Current:260mA (typical)

Stand-by Current :165mA (typical)

Supported Host Interface:RS232, USB

Battery:3.7V / 2500mAh

Performance Characteristics

Image (Pixels) : 1280 x 1024

Illumination: DPM: Red & Blue & White LED
HD&HP: White LED

Aiming: Red LED

Field of View: 44° (H) x 34° (V)

Scans per Full Charge: 12,000+ times at 2sec intervals

Charge Time: 6.5 Hours

Symbology Decode Capability

1-D: Codabar, Code 39, Code 32 Pharmaceutical (PARAF), Interleaved 2 of 5, NEC 2 of 5, Code 93, Straight 2 of 5 Industrial, Straight 2 of 5 IATA, Matrix 2 of 5, Code 11, Code 128, GS1-128, UPC-A, UPC-E, EAN/JAN-8, EAN/JAN-13, MSI, GS1 DataBar Omnidirectional, GS1 DataBar Limited, GS1 DataBar Expanded, China Post(Hong Kong 2 of 5), Korea Post

2-D:Codeblock A, Codeblock F, PDF417, Micro PDF417, GS1 Composite Codes, QR Code, Data Matrix, MaxiCode, Aztec, HANXIN.

User Environment

Operating Temperature : 0 to +45°C

Storage Temperature : -10 to +50°C

Humidity : 5% to 85%(Non-condensing)

Shock Specifications : Multiple drops at 1.2m to concrete

Ambient Light Immunity :0-100,000 Lux.

Sealing: CordeCorded: IP54
Cordless: IP5x(scanner only)

Suzhou Wmaxvision Technology Co., Ltd.

TEL:0512-86860596

E-MAIL:sales@wmaxvision.com

WEB:http://www.wmaxvision.com

ADD:Building 2, Lianchuang Industrial Park, Dongfu Road, Suzhou Industrial Park, China (Jiangsu)

Decode Ranges (CM)

Symbol / Resolution	DPM	HD	HP
Code39: 4mil	NT	5 to 21	6 to 22
Code39: 5mil	0 to 7.5	5 to 27	5.5 to 30
Code39: 13mil	2 to 16	6 to 43	5 to 52
Code128: 13mil	NT	5 to 43	4 to 52
Code128: 20mil	NT	6 to 50	5.5 to 70
QR: 15mil	NT	4 to 29	4.5 to 26
QR: 20mil	NT	4 to 33	5.5 to 42
QR: 30mil	NT	5 to 43	5 to 60
PDF417: 6.7mil	NT	3 to 29	3.5 to 39
DM: 7.5mil	NT	4 to 21	9.5 to 21
DM: 15mil	NT	3 to 28	7 to 33
EAN13: 5mil	NT	7 to 12	6 to 17
EAN13: 13mil	NT	4 to 40	4 to 58

Performance may be impacted by bar code quality and environmental conditions

Dimension (unit:mm)**VS400 Corded**

Suzhou Wmaxvision Technology Co., Ltd.

TEL:0512-86860596

E-MAIL:sales@wmaxvision.com

WEB:http://www.wmaxvision.com




ADD:Building 2, Lianchuang Industrial Park, Dongfu Road, Suzhou Industrial Park, China (Jiangsu)

VS400

SPECIFICATIONS

Wmaxvision 威码视

VS402 Cordless & Base

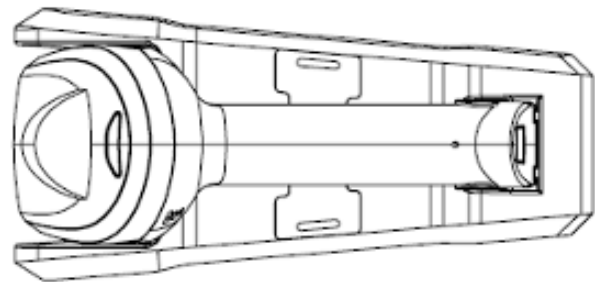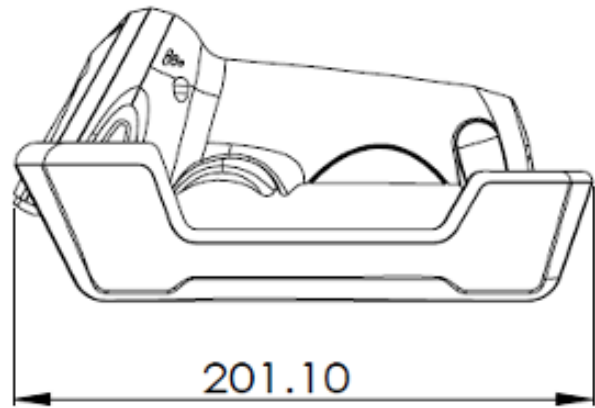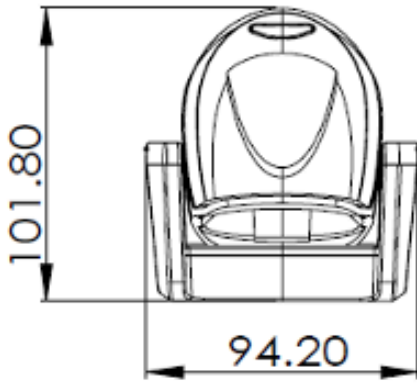

Suzhou Wmaxvision Technology Co., Ltd.

TEL:0512-86860596

E-MAIL:sales@wmaxvision.com

WEB:http://www.wmaxvision.com

ADD:Building 2, Lianchuang Industrial Park, Dongfu Road, Suzhou Industrial Park, China (Jiangsu)