



Fixed Mount VS200

Wmaxvision 威码视



Fast Decode



Quick Scan



1D Decode




2D Decode

Feature

- The barcode reader automatically eliminates halos, so there is no need to adjust the mounting angle and illumination fill light when in use. Used in conjunction with autofocus, it realizes high-freedom mounting.
- Specific algorithms were added, very small Vericode on the LCD screen which can be easily read.

Application

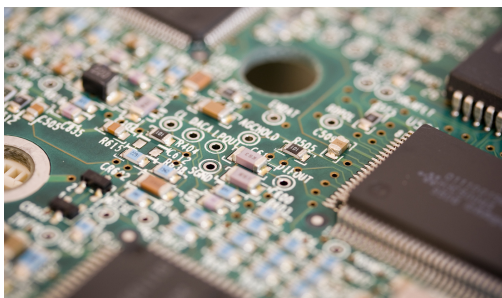

Suzhou Wmaxvision Technology Co., Ltd.

TEL:0512-86860596

E-MAIL:sales@wmaxvision.com

WEB:http://www.wmaxvision.com

ADD:Building 2, Lianchuang Industrial Park, Dongfu Road, Suzhou Industrial Park, China (Jiangsu)

VS200

SPECIFICATIONS

Wmaxvision 威码视

Image sensor

Sensor: CMOS sensor

Resolution: 1920 x 1080

Frame rate: 60fps

Camera lens

Lens: VCM Autofocus

Angle: Horizontal: 18° Vertical: 14°

Light source

Illumination light: Red LED

Aiming light: Green LED

Indicator light: Red, Green LED

Coding support

1-D: Codabar、Code 39、Code 32 Pharmaceutical (PARAF)、Interleaved 2 of 5、NEC 2 of 5、Code 93、Straight 2 of 5 Industrial、Straight 2 of 5 IATA、Matrix 2 of 5、Code 11、Code 128、GS1-128、UPC-A、UPC-E、EAN/JAN-8、EAN/JAN-13、MSI、GS1 Data Bar Omnidirectional、GS1 Data Bar Limited、GS1 Data Bar Expanded、China Post(Hong Kong 2 of 5)、Korea Post.

2-D: Code block A、Code block F、PDF 417、Micro PDF 417、GS1 Composite Codes、QR Code、Data Matrix、MaxiCode、Aztec、HANXIN.

Minimum Element Resolution

≥ 4mil

Input/Output

Two Signals Input

Three Signals Output

	RS232C
Serial Communication	Baud rate: 9600、19200、38400、57600、115200bps

USB: Compliant with USB standard protocol

Ethernet	100BASE-TX
	TCP/IP

Suzhou Wmaxvision Technology Co., Ltd.

TEL: 0512-86860596

E-MAIL: sales@wmaxvision.com

WEB: <http://www.wmaxvision.com>

ADD: Building 2, Lianchuang Industrial Park, Dongfu Road, Suzhou Industrial Park, China (Jiangsu)

VS200

SPECIFICATIONS

Wmaxvision 威码视

Nominal value

Voltage: 24VDC $\pm$ 10%

Current: Standby current: 200mA
Working current: 700mA

Power dissipation: 16.8W

Environmental resistance

Temperature: Operation temperature: 0 -- +45°C
Storage temperature: -10 -- +50°C

Relative humidity
5% -- 85% (non-condensing)

Humidity
Storage environment humidity
5% -- 85% (non-condensing)

Protection level: IP54

Ambient lighting: 0 to 100,000Lux

Drop: Capable of withstanding multiple impacts of falling from a height of 1.2 meters onto the cement floor (allowable deviation of 5 °)

Machinery

Dimension: 88.7mm x 47.0 mm x45.5 mm

Weight:180g

Shell material: Aluminum Alloy

Performance may be impacted by bar code quality and environmental conditions

Suzhou Wmaxvision Technology Co., Ltd.

TEL:0512-86860596

E-MAIL:sales@wmaxvision.com

WEB:http://www.wmaxvision.com

ADD:Building 2, Lianchuang Industrial Park, Dongfu Road, Suzhou Industrial Park, China (Jiangsu)

VS200

SPECIFICATIONS

Wmaxvision 威码视

Dimension (unit:mm)



Suzhou Wmaxvision Technology Co., Ltd.

TEL:0512-86860596

E-MAIL:sales@wmaxvision.com

WEB:http://www.wmaxvision.com

ADD:Building 2, Lianchuang Industrial Park, Dongfu Road, Suzhou Industrial Park, China (Jiangsu)