


Wireless Scanner

NT1690SW


Wmaxvision 威码视




Fast Decode



Screen Scan



Quick Scan



Bluetooth



100m
transmission distance




USB

Feature

- Long-distance wireless communication technology to achieve scanning within 100m (open space)
- The world's top decoding algorithm, it can quickly and accurately decode various one-dimensional and two-dimensional barcodes.
- Supports scanning various high-density, damaged and deformed barcodes

Application

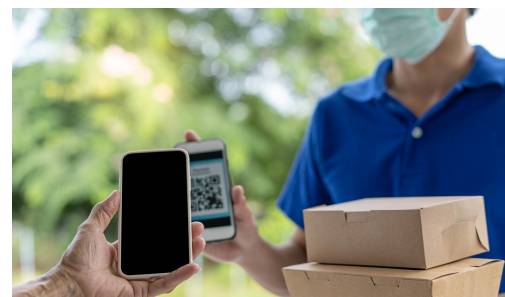

Suzhou Wmaxvision Technology Co., Ltd.

TEL:0512-86860596

E-MAIL:sales@wmaxvision.com

WEB:http://www.wmaxvision.com

ADD:Building 2, Lianchuang Industrial Park, Dongfu Road, Suzhou Industrial Park, China (Jiangsu)

NT1690SW

SPECIFICATIONS

Wmaxvision 威码视

Physical Characteristics

Dimensions: 162.7mm x 62.8mmx85.9mm

Voltage: +4.2V±10% VDC

Weight : 157.5g

Starting Current: 495mA

Stand-by Current :250mA

Work Current: 355mA

Performance Characteristics

Image (Pixels) : 640 pixels (H) x 480 pixels (V)

Light Source: (Aimer) Red color LED; (Illumination) White color LED

Wireless signal: 2.4 -2.5 GHz bandwidth range, Bluetooth V2.0/V3.0/V4.0

Field of View : 37°(H) , 28°(V)

Roll / Pitch / Yaw:360°, ±65°, ±65°

Print Contrast: 20% minimum reflective difference

Battery Specification: 3.7/2500mAh

Endurance: 5 hours

Charging Time: 6.5 hours

Distance: 100m(Open space),Support storage

Storage Capacity: 20,000 Codes (13 characters/code)

Symbology Decode Capability

1-D: Codabar、Code 39、Code 32 Pharmaceutical (PARAF)、Interleaved 2 of 5、NEC 2 of 5、Code 93、Straight 2 of 5 Industrial、Straight 2 of 5 IATA, Matrix 2 of 5, Code 11、Code 128、GS1-128、UPC-A、UPC-E、EAN/JAN-8、EAN/JAN-13、MSI、GS1 DataBar Omnidirectional、GS1 DataBar Limited、GS1 DataBar Expanded、China Post(Hong Kong 2 of 5)、Korea Post.

2-D: Codeblock A、Codeblock F、PDF417、Micro PDF417、GS1 Composite Codes、QR Code、Data Matrix、MaxiCode、Aztec、HANXIN.

Suzhou Wmaxvision Technology Co., Ltd.

TEL:0512-86860596

E-MAIL:sales@wmaxvision.com

WEB:http://www.wmaxvision.com

ADD:Building 2, Lianchuang Industrial Park, Dongfu Road, Suzhou Industrial Park, China (Jiangsu)

NT1690SW

SPECIFICATIONS

Wmaxvision 威码视

Decode Ranges

Code39(5mil) : 30-80mm

Code39(13mil) : 45-200mm

Alipay QR(3*3cm) : 50-500mm

User Environment



Humidity : 5% to 95% relative humidity, non-condensing

Shock Specifications : Designed to withstand 1.5m(5') drops

Ambient Light Immunity : 0-100,000 Lux.

Performance may be impacted by bar code quality and environmental conditions

Dimension (unit:mm)

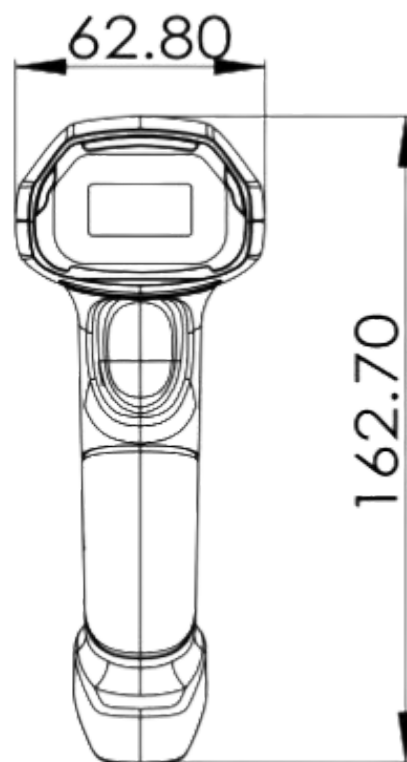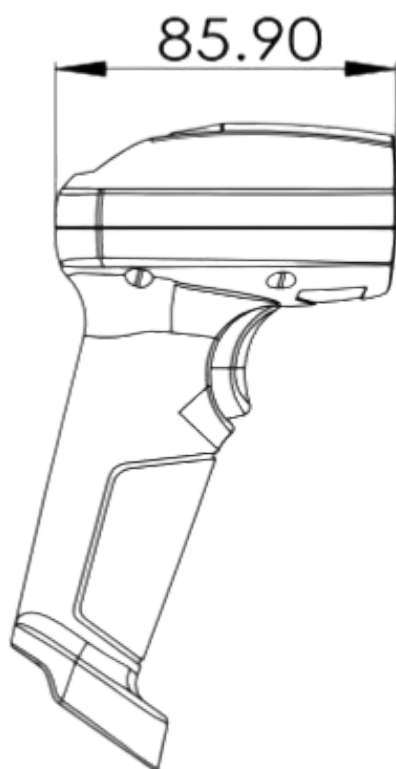

Suzhou Wmaxvision Technology Co., Ltd.

TEL:0512-86860596

E-MAIL:sales@wmaxvision.com

WEB:http://www.wmaxvision.com

ADD:Building 2, Lianchuang Industrial Park, Dongfu Road, Suzhou Industrial Park, China (Jiangsu)